

SUBKULTUR

Subkultur Hannover

Engelbosteler Damm 87

30167 Hannover

Contact Club (Owner)

Jens Klostermann
+49 174 – 393 49 94
jens@subkultur-hannover.de
sekretariat@subkultur-hannover.de

Contact Sound

Henning Mai
+49 171 – 176 79 69
henningmai@me.com

Contact Lights

Steffen "Mörle" Böttger
+49 162 – 167 42 89
info@stagelights.de

VENUE SPECS

Last Update: April 2022

Please note: Our Sound-Engineer will be at the venue any time and has to be payed by you. He also has to be paid if you bring your own technician.

If you need a Lightoperator, the same conditions apply, but he won't be at the venue if you don't need him.

SOUND

Mixing Desk: Allen & Heath SQ5
Behringer X32 incl. USB / Firewire-Card

Multicore: Allen & Heath AR2412
Behringer S16 16/8,
Analog 16/4

PA: 2x Kling & Freitag CA1215'9 Top Front (12" / 1,5" 90° x 50°; 400W)
2x Kling & Freitag CA1201 Rear for Disco etc. (12" / 1" 90° x 60°; 300W)
2x Kling & Freitag Access B10 Sub under the Stage (2 x 18", 1400W, mono enfi red)

Monitor: Wedge: 3x dB Technologies LVX XM 12 (1x 12" + 1x 2,5" Voice Coil; 70° x 90°; 600W RMS)
Drums: 1x dB Technologies LVX XM 15 (1x 15" + 1x 2,5" Voice Coil; 70° x 90°; 600W RMS)
Side-Fill Left / Right: the box PA302A (12"+ VCD Horn; 55° X 55°-100° Low 300W / High 100W)

Microphone: 1x Sennheiser e901
1x Shure PG52
4x Sennheiser e604
2x Røde NT5
2x Sennheiser e906
1x Shure PG81
2x Shure SM57
6x Shure SM58
2x Palmer PAN 02
1x Palmer PAN 01
3x Behringer DI20

Stands: 7x tall boom
6x small boom
3x tall without boom

DJ: 1x Pioneer DJM800

LIGHTS


Overview:

- | | |
|--|---------------------------------------|
| 10x Stairville Mini Stage Par 4x7 RGBW | 1x Fog-Machine (No DMX) |
| 6x Varytec Hero Wash 712 RGBW Zoom | 1x SmokeFactory TourHazer 2 |
| 4x Varytec Hero Spot 90 | |
| 4x PAR 64 (Front) LEE 250 filtered (on 3 Channels) | 2x Laser (Dancefloor) |
| 1x Fresnel (Front) | 4x UV Canon (Dancefloor, No DMX) |
| 1x American DJ 1500 Strobe (Back) | 1x Dancefloor Spider |
| 2x Stairville Wild Wash 132 CW (Dancefloor) | 4x Mini Beam (Dancefloor) |
| 1x Botex ES-2000 Strobe (Dancefloor) | 1x Projector 1500 ANSI Lumen |
| 2x Stairville MH-X25 Spot (Dancefloor) | 1x American DJ Starburst (Dancefloor) |
| 2x Ignition 2-Blind LED (Backtruss) | 2x Renkforce Triple Spider (Front) |

Controlled by

1x Chamsys MagicQ PC with MiniWing (PC with Touchscreen)

A Console (Chamsys MQ80 or Chamsys MaxiWing) is available but there are additional costs. Contact us!

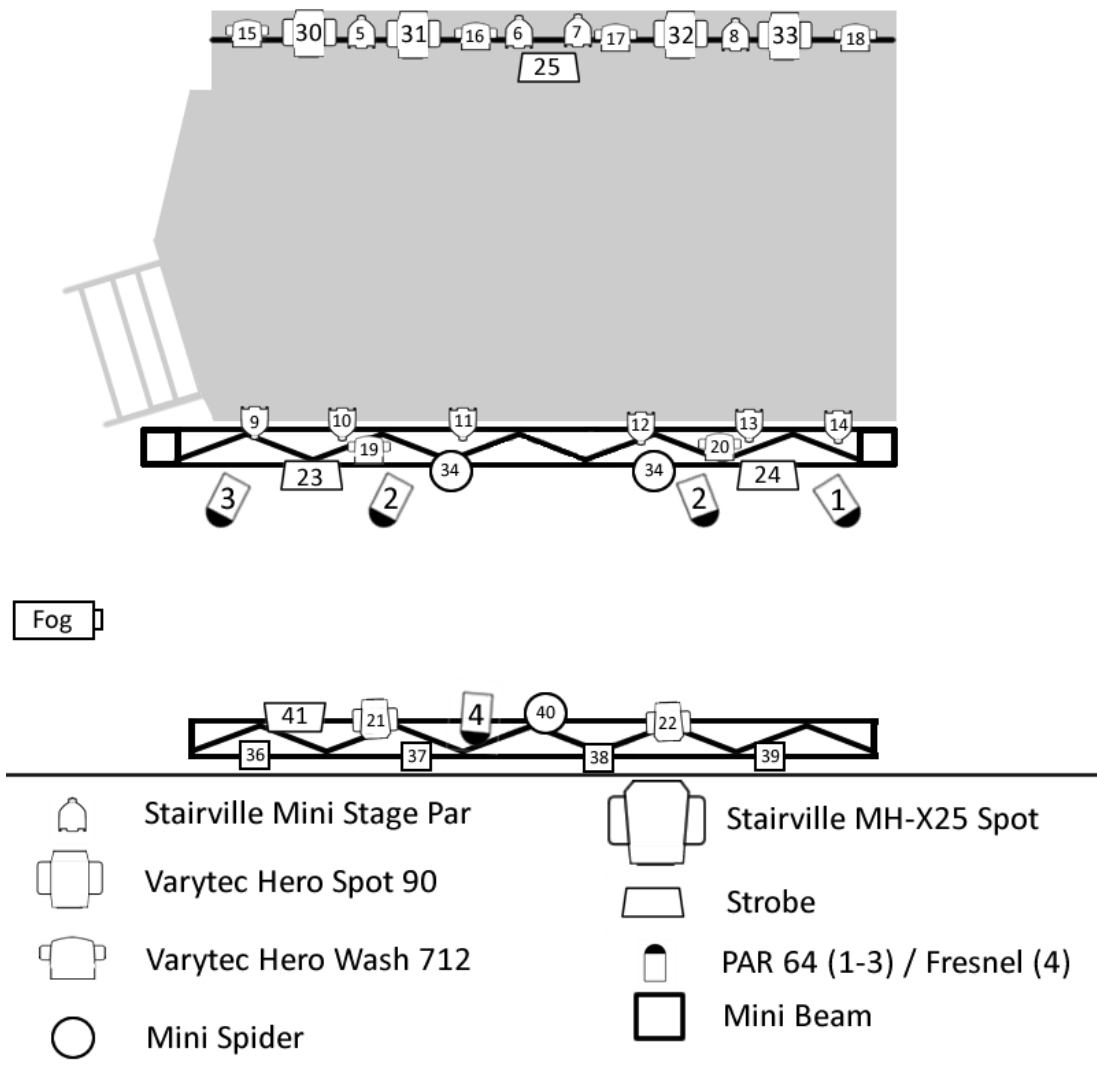

DMX Patch (Only one universe)

Head No	DMX	Name
1	001	PAR 64 Right
2	002	PAR 64 Middle (2x)
3	003	PAR 64 Left
4	004	Fresnel Front
5	088	Stairville Mini Stage Par 4x7 RGBW (8-Ch Mode) Backtruss
6	096	Stairville Mini Stage Par 4x7 RGBW (8-Ch Mode) Backtruss
7	104	Stairville Mini Stage Par 4x7 RGBW (8-Ch Mode) Backtruss
8	112	Stairville Mini Stage Par 4x7 RGBW (8-Ch Mode) Backtruss
9	120	Stairville Mini Stage Par 4x7 RGBW (8-Ch Mode) Fronttruss
10	128	Stairville Mini Stage Par 4x7 RGBW (8-Ch Mode) Fronttruss
11	136	Stairville Mini Stage Par 4x7 RGBW (8-Ch Mode) Fronttruss
12	144	Stairville Mini Stage Par 4x7 RGBW (8-Ch Mode) Fronttruss
13	152	Stairville Mini Stage Par 4x7 RGBW (8-Ch Mode) Fronttruss
14	160	Stairville Mini Stage Par 4x7 RGBW (8-Ch Mode) Fronttruss
15	005	Varytec Hero Wash 712 RGBW Zoom (15-Ch Mode) Backtruss
16	020	Varytec Hero Wash 712 RGBW Zoom (15-Ch Mode) Backtruss
17	035	Varytec Hero Wash 712 RGBW Zoom (15-Ch Mode) Backtruss
18	050	Varytec Hero Wash 712 RGBW Zoom (15-Ch Mode) Backtruss
19	263	Varytec Hero Wash 712 RGBW Zoom (15-Ch Mode) Fronttruss
20	278	Varytec Hero Wash 712 RGBW Zoom (15-Ch Mode) Fronttruss
21	168	Stairville MH-X25 Spot (12-Ch Mode) Dance Truss
22	180	Stairville MH-X25 Spot (12-Ch Mode) Dance Truss
23	080	Stairville Wild Wash 132 CW (2-Ch Mode)
24	082	Stairville Wild Wash 132 CW (2-Ch Mode)
25	084	American DJ Strobe 1500 Back (2-Ch Mode)
26	195	8x PAR 36 Pinpoint "ACL" (Switch only!)
27	196	Laser
28	197	Switch 3
29	198	Switch 4
30	199	Varytec Hero Spot 90 (16-Ch Mode) Backtruss
31	215	Varytec Hero Spot 90 (16-Ch Mode) Backtruss
32	231	Varytec Hero Spot 90 (16-Ch Mode) Backtruss
33	247	Varytec Hero Spot 90 (16-Ch Mode) Backtruss
34	297	Renkforce MiniSpider
35	500 + 505	Truss LED Par (5-Ch. R,G,B,Dim,Shutter)
36	308	MiniBeam (13-Ch Mode) Dance Truss
37	321	MiniBeam (13-Ch Mode) Dance Truss
38	334	MiniBeam (13-Ch Mode) Dance Truss
39	347	MiniBeam (13-Ch Mode) Dance Truss
40	360	Dancefloor Spider (13-Ch)
41	086	Botex ES-2000 (2-Ch.) Dance Truss
42	066	Subkultur Laser (12-Ch Mode) Dance Truss NO USE FOR BANDS!
43	373	Dance Laser (7-Ch Mode) NO USE FOR BANDS!
44	391	ADJ Starburst (12Ch)
45	380	11Ch LED RGB Wash Moving Lights (Dancefloor)
46	403	2x Renkforce Triple Spider (13Ch)
47	416	Ignition 2-Blind (2Ch)
48	418	Ignition 2-Blind (2Ch)
49	510	SmokeFactory TourHazer 2

DMX Channels of Fixtures

Varytec Hero Wash 712RGBW Z	
Ch	Function
1	Pan
2	Pan Fine
3	Tilt
4	Tilt Fine
5	P/T Speed
6	Dimmer
7	Shutter
8	Red
9	Green
10	Blue
11	White
12	CTC
13	Col Macro
14	Zoom N<W
15	Control

Mini Beam	
Ch	Function
1	Pan
2	Pan Fine
3	Tilt
4	Tilt Fine
5	P/T Speed
6	Dimmer
7	Shutter
8	Red
9	Green
10	Blue
11	White
12	Auto
13	Reset

Stairville MH-X25	
Ch	Function
1	Pan
2	Tilt
3	Pan Fine
4	Tilt Fine
5	P/T Speed
6	Colour
7	Shutter
8	Dimmer
9	Gobo
10	Gobo Rot.
11	Function
12	Macro

Stairville Mini Stage PAR 4x7 RGBW	
Ch	Function
1	Red
2	Green
3	Blue
4	White
5	Automatic
6	Shutter
7	FX
8	Dimmer

Varytec Hero Spot 90	
Ch	Function
1	Pan
2	Pan Fine
3	Tilt
4	Tilt Fine
5	P/T Speed
6	Dimmer
7	Shutter
8	Colour
9	Static Gobo
10	Rot. Gobo
11	Gobo Rot.
12	Focus
13	Prism
14	Automatic
15	P/T-Auto
16	Control


Stairville Wild Wash 132 CW	
Ch	Function
1	Dimmer
2	Shutter
To 5	Open
To 10	Blackout
To 250	Strobe S>F
To 255	Open/Blinder

Renkforce MiniSpider	
Ch	Function
1	Pan
2	Tilt Bar 1
3	Tilt Bar 2
4	P/T Speed
5	Dimmer
6	Shutter
To 007	Closed
To 015	Open
To 131	Strobe S>F
To 139	Open
To 181	Strobe FX
7	Red
8	Green
9	Blue
10	White
11	Control *

Renkforce TripleSpider	
Ch	Function
1	Pan
2	Pan Fine
3	Tilt Bar 1
4	Tilt Bar 2
5	Tilt Bar 3
6	Dimmer
7	Shutter
8	Red
9	Green
10	Blue
11	Effect
12	PT Speed
13	Control *

* No Function: 000 – 007, Auto: 008 – 127; Reset: 128 - 255

STAGE

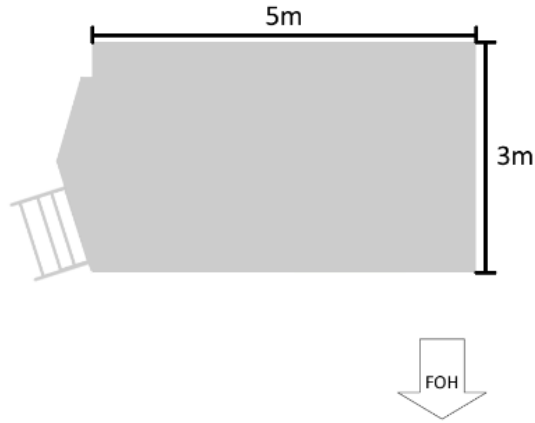


- Size: 5m width / 3m depth / 0,65m height
Ca. 3m clearance
- Backdrop: motorized 5m Pipe with ~2,50m Clearance, BACKDROPS ONLY!
- Additional Power Supply: 32A CEE Stage Right (with PowerSplit: 32A CEE Thru, 2x 16A CEE, 4x 230V Schuko)
- Additional DMX: One free Universe from Light FOH to Stage Right

FOR INFORMATIONS ABOUT PARKING SLOT OR POWER SUPPLY (32A CEE) FOR NIGHTLINERS ETC. CONTACT US!

Club Overview

Capacity: 173 pax

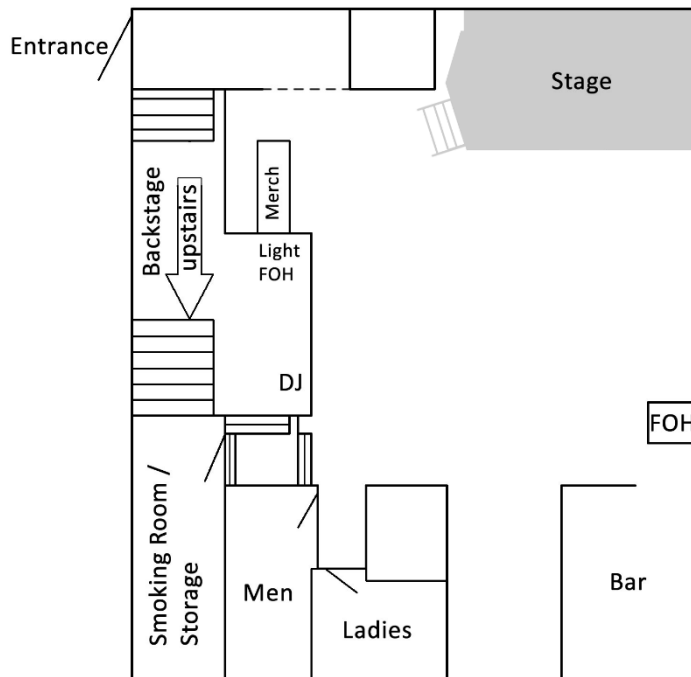

NOT TO SCALE